


HIGH TECHNOLOGY FOR FAMILY AGRICULTURE



Transmission Adjustment: by a combination with sprockets, the sprockets are fixed in the easy place in the frame.



Depth Planter Control: helps in a quick adjustment to the planter



Fertilizer Feeder Mechanism: mechanical Carrier rotor type feeder with self cleaning milimetric adjustment, initiated by worm screw



Seed sowing: the seed sowing system is thought two mismatched disks mounted in "V" shape with 13" and 14".



Individual Fertilizer Bin: made in high – density polyethylene anticorrosive, high useful life for the equipment.



Cover mechanism: two rubber wheels for depth control and 3rd compactor wheel.



Seed Distributor: by disks with selected hole offering precision and efficiency.



Option: Two small disks, system for cover up the row, with compactor and depth control by 3rd wheel.



Seed Bin: polyethylene bucket type for thick grains, with 25 kg capacity per row.



Option: Two metal wheels in "V" shape for depth control with angle adjustment to cover up the rows. With 3rd compactor wheel.






Operation access platform: rear platform providing perfect operation and supply conditions.



Option: Two metal wheels in "V" shape for depth control with angle adjustment to cover up the rows.

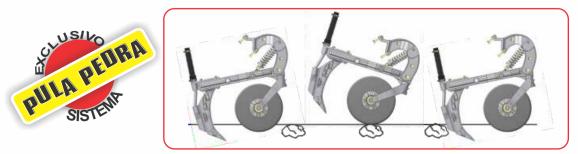


Feeling the need of several producers who cultivate rocky lands, VENCE TUDO has developed the most efficient penetration and ground attack system. Baptized and patented "stone Jumper" a simple name which exemplifies in a practical way it is essential operation to a uniform and much more efficient planting, ensuring better germination and significantly avoiding breaks and stops, common in these soil situations, reducing time and costs in the plantation process.

TECHNICAL FEATURES

FEATURES		MODELS														
		PA 2000		PA 3000		PA 5000		PA 6000				PA 7000				
Rows		м	ິ	м	s	м	м	S	м	м	м	S	М	м	м	S
		2	3	2	3	3	4	5	3	4	5	6	4	5	6	7
Spacing (cm)		60		60	40	65							75	60	45	40
		65		65		70				65						
		70	43	70	43	75	50	40	85	70	50	40	80	65	50	
		75		75		80	55			75	55					45
		80	45	80	45	85	60	45	90	80	60	45	85	70 5		
		85		85	50	90							90		55	
		90		90									30			
Seed Capacity Kg		25		25		25			25			25				
Seed Capacity	Lts	31		31		31			31				31			
Fertilize Capacity Kg		72		7	2	2 72			72				72			
Tertifize Capacity	Lts	64 64		4	64			64				64				
Working Speed (km-h)		4.5	6.0	4.5	6.0	4.5 6.0		4.5			6.0	4.5 6.0		6.0		
		6.5	8.5	6.5	8.5	6.5 8.5		6.5			8.5		6.5		8.5	
Weight (Kg)		635	725	650	740	740	830	920	900	990	1080	1170	986	1037	1296	1365
Hp required (cv)		35		35		50			65				70			
Wheel size and work pressure	500/6 - 12 Working pressure in 18 lbs-pol															
Perimeter driving wheel		1,81 Based in the external side														

M = Corn S = Soybeans Weights, dimensions and specifications in this brochure are subject to variations without prior notice.OBS. Minimum distance between rows is 45 cm





MODEL	Α	В	С	D	Е	F	G
PA 2000	1945	1640	725	400-900	1400	1340	1950
PA 3000	2415	2140	725	400-900	1400	1340	1950
PA 5000	2445	2140	725	400-900	1400	1340	1950
PA 6000	3015	2740	725	400-900	1400	1340	1950
PA 7000	3445	3170	725	400-900	1400	1340	1950

The information in this brochure is subject to variations. Weights, dimensions and specifications are approximated only and the pictures do not reflect their standard condition. To obtain accurate information about any particular model, please consult.

INDÚSTRIA DE IMPLEMENTOS AGRÍCOLAS VENCE TUDO IMPORTAÇÃO E EXPORTAÇÃO LTDA.

Rod. RS 223 - Km 53 - Área Industrial - Ibirubá - RS - Brasil Phone: 55 54 3324-8000 - Fax: + 55 54 3324-8010 e-mail: comex@vencetudo.ind.br | www.facebook.com/vencetudo | www.youtube.com/industriavencetudo

อเเกล์ www.vencetuc 770

PLANTER AND FERTILIZER (HYDRAULIC)



